

BRASS BALL VALVE

Ref. 504

Ref. : DS 504

Rev. : 5

Date : 09/08

Page 1/1

SPECIFICATIONS :

- . Full bore
- . With gland pack
- . Aluminium handle
- . Flanged GN16

USE :

- . For common fluids
- . Max Temperature Ts : 100°C
- . Max pressure Ps : 16 bars

RANGE :

- . Flanged GN10/16 Ref. 504 DN15 to DN100




MATERIALS :

DESIGNATION	MATERIALS
Body	Brass EN 12165
Ball	Brass EN 12165
Stem	Brass EN 12164
Seat	PTFE
Packing	PTFE
Handle	Aluminium

SIZE :

DN	16	20	26	32	40	50	65	80	100
Ref. Ø	16	20	26	32	40	48	60	74	94
604 L	95	80	85	100	110	125	140	160	170
H	70	70	80	100	110	120	130	145	170
L1	140	140	185	185	200	200	240	240	320
Welig.	1,4	1,8	2,5	3,62	4,78	6,5	8,9	11,86	15,8

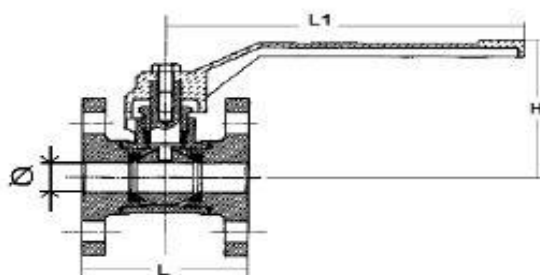

STANDARDS :

- . DIRECTIVE 87/23/CE : Products excluded from directive (article 1, § 3.2)

ADVICE : Our opinion and our advice are not guaranteed and shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.