


## GATE VALVE NP 16 FLANGED ENDS DIN NP 10/16

gate valves 10NE are used in many industrial installations. Their conception allows working with aggressive fluids and in the most demanding conditions.


RANGE: from ND15 up to ND300.  
FACE TO FACE LENGTH: DIN 3202 F1.  
FLANGED ENDS: DIN 2633 NP16.



ND	L	H	W	Kgs.
15	130	183	120	4
20	150	190	120	5
25	160	210	120	6
32	180	270	200	7
40	200	270	200	8
50	230	320	200	11
65	290	375	200	14
80	310	445	250	17
100	350	523	250	22
125	400	606	300	31
150	480	710	300	44
200	600	910	350	71
250	730	1117	400	117
300	850	1324	400	155



### MATERIALS

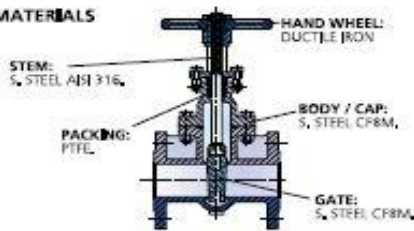

### GENERAL CHARACTERISTICS:

- Investment casting (up to ND150L)
- Rising stem.
- Metal / metal sealing.
- Full bore.
- High mechanical resistance.
- Low pressure drop.
- Two directional closure.
- Total tightness.
- Low torque output.
- Seats and packing made of high resistant Teflon.
- Low cost installation and maintenance.
- Temperature between 0°C and 205°C (depending on working pressure).

### PRESSURE - TEMPERATURE RATING

